


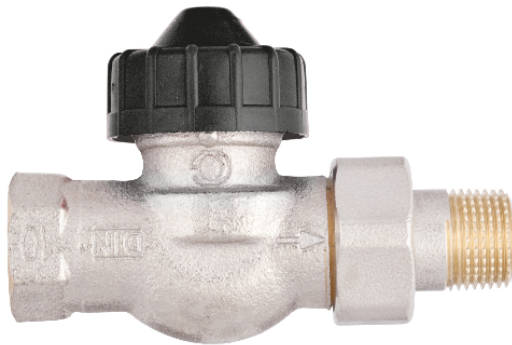

thermostat valve body Vario M D DN15

Part no. 141 270.101

thermostat valve body

benefits

- fully adjustable
- valve insert can be replaced without system having to be drained
- various versions and sizes for virtually any application

Application

Suitable for medium water volumes. For installation in dual-pipe central heating systems.

Description

Low-noise thermostat valve body with threaded connection M 30 x 1.5 mm for thermostat control heads and actuators. Mounting cap with valve shut-off function. Fully adjustable with ES-SV adjustment key. Valve spindle with double O ring seal. The valve insert can be replaced with the MGV mounting unit at operating pressure without the system having to be drained.

Technical Specifications

System connection

see ordering table

Thermostat head/actuator connection

Threaded connection M 30 x 1.5 mm

Adjustment range

12 – 250 l/h

Nominal pressure

max. 10 bar

Nominal diameter

DN 15


Operating temperature range

Medium: max. 120 °C

Housing

Gunmetal, nickel-plated

Technical Drawings

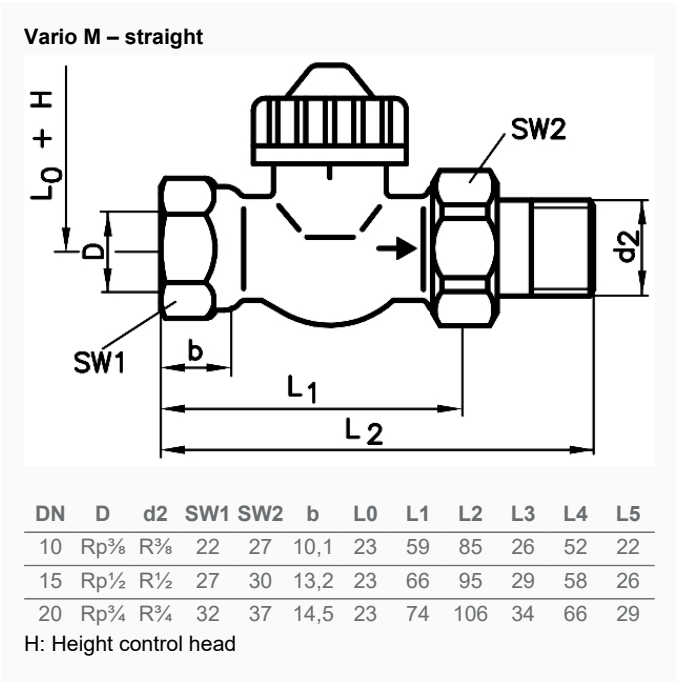

Versions

		Version	Version	Nominal diameter	Connec- tion	Flow co- efficient*	Flow co- efficient Kvs**		Part no.
	Vario M	for medi- um water volumes	Straight	DN 15	Rp $\frac{1}{2}$ x R $\frac{1}{2}$	0.038 – 0.4 m ³ /h	0.79 m ³ /h		141 270.101

- in-stock items
- Non-stock items