


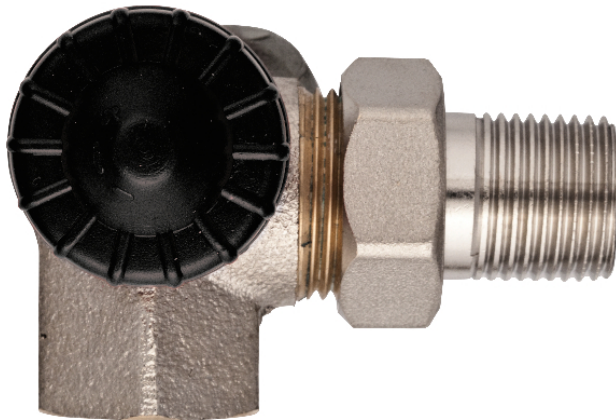

thermostat valve body Vario M WE-L DN15

Part no. 147 220.101

thermostat valve body

benefits

- fully adjustable
- valve insert can be replaced without system having to be drained
- various versions and sizes for virtually any application

Application


Suitable for medium water volumes. For installation in dual-pipe central heating systems.

Description

Low-noise thermostat valve body with threaded connection M 30 x 1.5 mm for thermostat control heads and actuators. Mounting cap with valve shut-off function. Fully adjustable with ES-SV adjustment key. Valve spindle with double O ring seal. The valve insert can be replaced with the MGV mounting unit at operating pressure without the system having to be drained.

Technical Drawings

Vario M – angled-angled, left

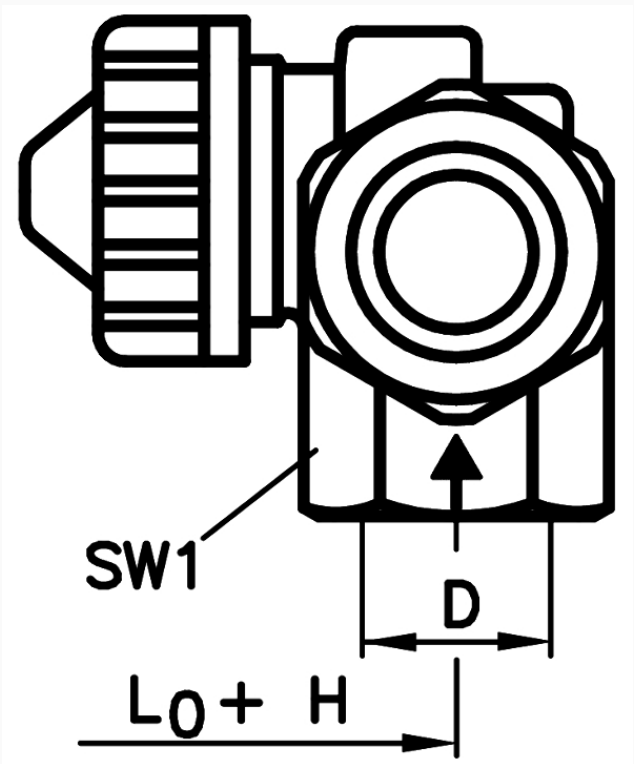

DN	D	d2	SW1	SW2	b	L0	L1	L2	L3	L4	L5
10	Rp $\frac{3}{8}$	R $\frac{3}{8}$	22	27	10,1	23	59	85	26	52	22
15	Rp $\frac{1}{2}$	R $\frac{1}{2}$	27	30	13,2	23	66	95	29	58	26
20	Rp $\frac{3}{4}$	R $\frac{3}{4}$	32	37	14,5	23	74	106	34	66	29

H: Height control head

Versions

			Version	Version	Nominal diameter	Connec- tion	Flow co- efficient*	Flow co- efficient Kvs**		Part no.
Vario M	for medi- um water volumes	ang- led-ang- led	left		DN 15	Rp $\frac{1}{2}$ x R $\frac{1}{2}$	0.038 – 0.4 m³/h	0.79 m³/h	●	147 220.101

- in-stock items
- Non-stock items