


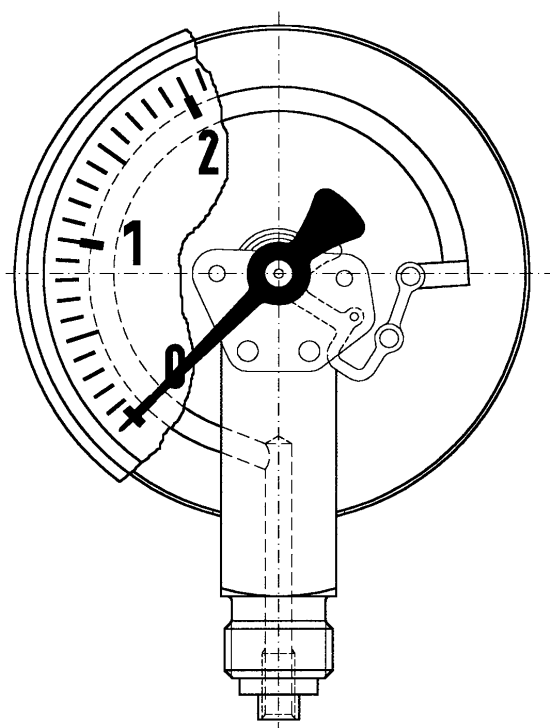

## Glycerine filled Bourdon tube pressure gauges RF100Gly

Part no. 85219751

Glycerine filled Bourdon tube pressure gauges Type D7

### benefits

- robust stainless steel housing
- can be used in case of heavy vibrations and high, dynamic pressure loads
- longer service life due to less wear and corrosion protection of the measuring system
- No steaming up of the inside of the window in case of outdoor applications

### Application

For gaseous and liquid media which are not highly viscous, do not crystallise and do not attack copper alloys. For measurements in areas with high vibration levels and high, dynamic pressure loads.

### Technical Specifications

**Type**  
D7

**Nominal size**  
100

**accuracy class (EN 837-1/6)**  
1.6

**ranges (EN 837-1/5)**  
see ordering table

**application area**  
static load:  $\frac{3}{4}$  x full scale value  
dynamic load:  $\frac{2}{3}$  x full scale value  
short-term: Full scale value

**Operating temperature range**  
Medium: max. 60 °C  
Ambient: -20/+60 °C

**Degree of protection**  
IP 65 (EN 60529)

**Connection**  
Brass, centre back

**Measuring element**  
Bourdon tube  
≤ 60 bar: "C" type tube  
> 60 bar: helical tube

**movement**  
Brass

**Dial**  
Aluminium, white  
Scaling: black  
RF100Gly

**Pointer**  
Aluminium, black

## Housing

Stainless steel 304, with blow-out

## crimped bezel

Stainless steel 304

## window

Plastic

## filling liquid


glycerine (99.5 %)

## Options

- Filling liquid silicone oil
- Back flange (NG 63/80/100)
- clamp fixing
- 3-hole fixing, panel mounting bezel
- crimped bezel polished
- measuring system stainless steel (up to 1,000 bar, NG 80/100)
- special scales
- Clip reference pointer, red, adjustable (NG 63)
- throttle screw
- other process connections

## Technical Drawings

**NG 100 – centre back connection, with clamp fixing**

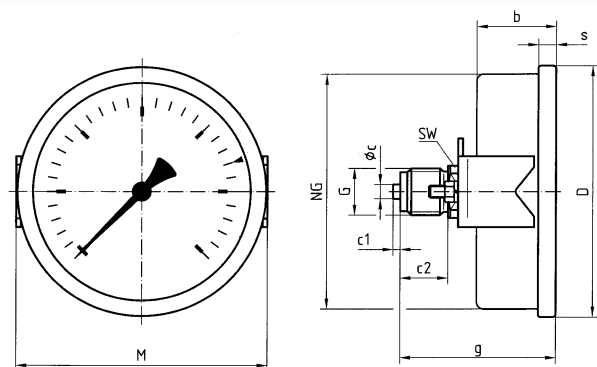

### Dimensions (mm)

| NG    | b    | Øc | c1 | c2 | D   | g    | G   | M   | s | SW |
|-------|------|----|----|----|-----|------|-----|-----|---|----|
| 80    | 33,5 | 5  | 2  | 13 | 85  | 56,5 | G¼B | 82  | 7 | 14 |
| Ms ax |      |    |    |    |     |      |     |     |   |    |
| 80    | 33,5 | 5  | 2  | 13 | 85  | 59   | G¼B | 82  | 7 | 14 |
| VA ax |      |    |    |    |     |      |     |     |   |    |
| 100   | 33,5 | 6  | 3  | 20 | 106 | 65,5 | G½B | 106 | 7 | 22 |
| Ms    |      |    |    |    |     |      |     |     |   |    |
| 100   | 33,5 | 6  | 3  | 20 | 106 | 76,5 | G½B | 106 | 7 | 22 |
| VA    |      |    |    |    |     |      |     |     |   |    |

Versions

| Range    | Mounting type | Type             |                                                                                     | Part number |
|----------|---------------|------------------|-------------------------------------------------------------------------------------|-------------|
| 0/60 bar | clamp fixing  | RF100Gly<br>D751 |  | 85219751    |

-  in-stock items
-  Non-stock items