



surface mounting thermostat with housing GAT/7RC

Part no. 67400X

surface mounting thermostat with housing

benefits

- mechanical temperature controller
- ideal for underfloor heating systems
- Temperature limitation at pipes
- easy installation with strap

Application

Surface mounting thermostat for strap mounting at pipes from 16 to 100 mm diameter. The version with internal adjustment and temperature control range up to 60 °C is specially suited for underfloor heating systems.

Description

The surface mounting thermostat uses a bimetal strip (element consisting of two metal strips with different heat expansion coefficients). When the temperature changes, the bimetal strip bends which triggers electrical switching.

Technical Specifications

Type

GAT

Operating range

see ordering table

Tolerance

+2 K/-8 K

Switching differential

$\Delta T 8 \pm 3 \text{ K}$

Setting

GAT/7RC

External

Probe element

Bimetal

Operating temperature range

Housing: max. 85 °C

Housing

Upper part: plastic (PVC), grey (RAL 7035)

base plate: steel, galvanised

Cable entry

plastic (PVC), black

M20 x 1.5


Degree of protection

IP 20 (EN 60529)

electrical switching contact
Changeover contact

Contact rating
NC: AC 250 V, 16 (2.5) A
NO: AC 250 V, 2.5 A

Technical Drawings

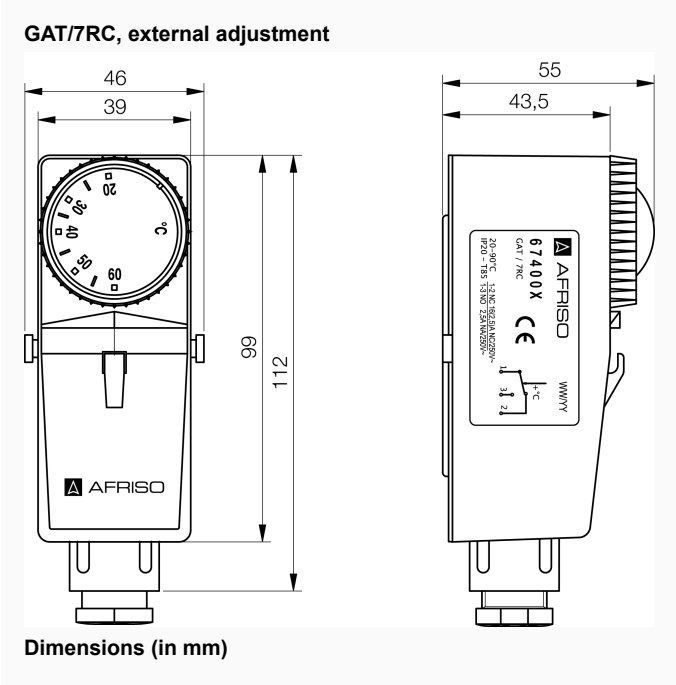

Versions

	adjustment	Operating range	Switching point	Switching point	capillary length	Stem length	Part no.
surface mounting thermostat with housing GAT/7RC	External	20/60 °C					67400X

- in-stock items
- Non-stock items